




Agility and Ready for Inverted Welding

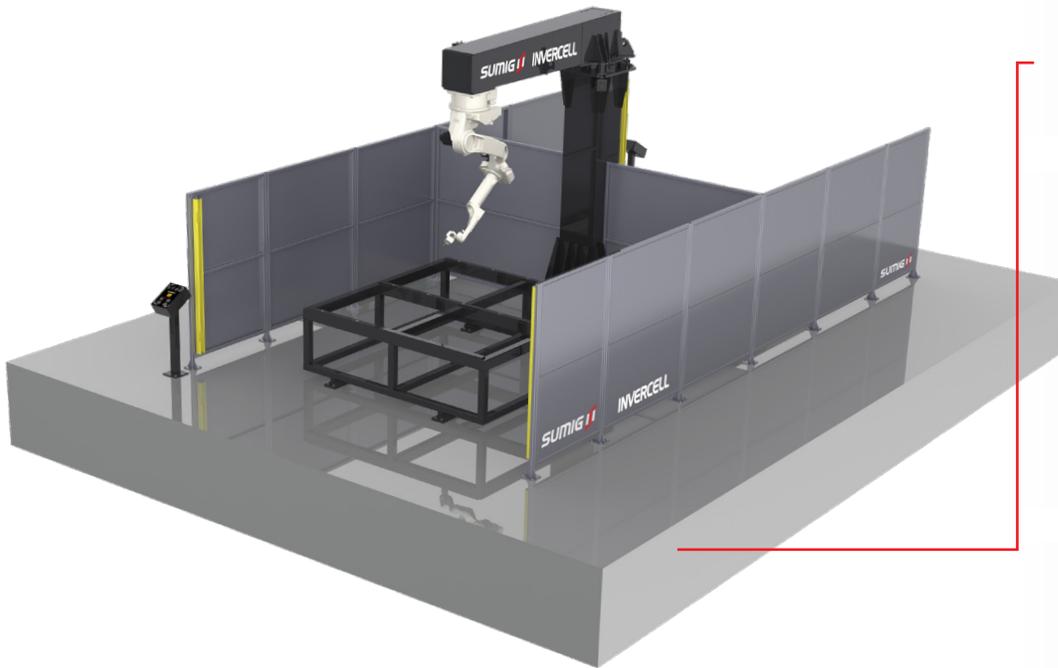

Quick installation and ready to weld model

Column type positioner for robots with indexing

Optimized working area

Ideal for large pieces



The **Advantage INVERCELL** cell is the only cell that provides welding of high complexity inverted and large parts. Ready to be installed and to weld, it has 02 (two) welding stations.

The Invercell has a fast exchanging system for safety devices and sensors for robot, power door and maintenance.

Included in package



+




+




Workstation dimensions	2500 x 2500 mm
Capacity	1000 kg
Maximum current for power source	63A
Maximum current for controller and robot	16A
Feeding	380V Trifásico
Dimensions	6000 x 9500 x 2120 mm
Weight	4000 kg
Power	26 kVA
Pressure	6 BAR
Air Flow	8,8 L/s
Size in m²	57m ²


Measurements

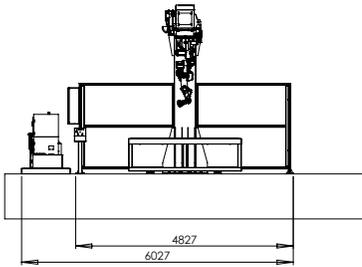

Front

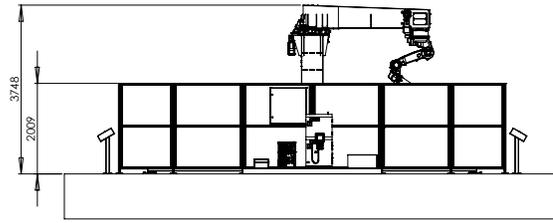

Side

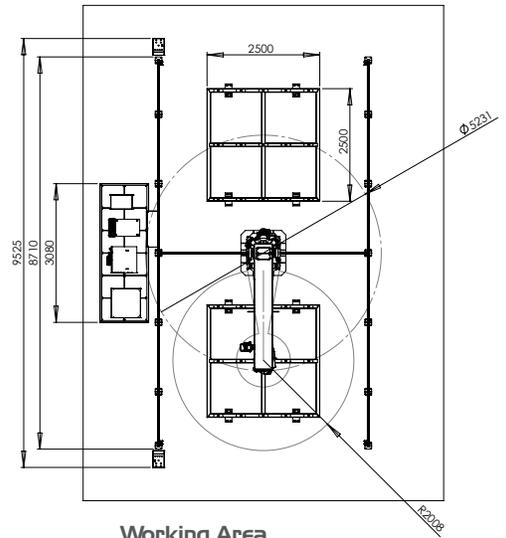

Working Area

Standard Components



OTC Robot



Power Source




SU477 Robotic Welding Torch

Optionals



Cleaning Unit



Tooling



Neuron-S Adapt