




Elongated Modular Base for Welding

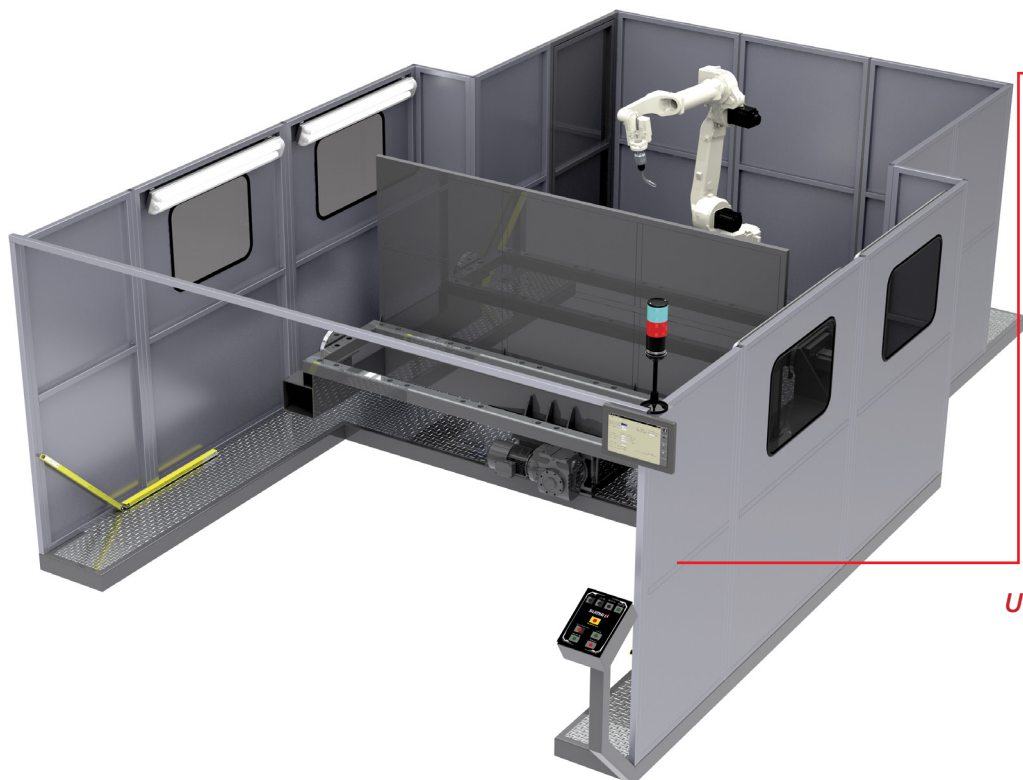

Fast installation and ready to weld

Ideal for medium and high productivity

Fast device exchanging system


Uses robot and source from the same manufacturer resulting in synchronism



The **Advantage REVOCELL VL** is designed for high productivity, its modular base provides greater agility and production.

The cell also has 02 workstations and a monitored maintenance port.

Included in package



+




+




| | |
|--|-----------------------|
| Workstation dimensions | 750 x 2500 mm |
| Capacity | 1000 kg |
| Maximum current for power source | 63A |
| Maximum current for controller and robot | 16A |
| Feeding | 380V Trifásico |
| Dimensions | 4200 x 7800 x 2120 mm |
| Weight | 4300 kg |
| Power | 26 kVA |
| Pressure | 6 BAR |
| Air Flow | 8,8 L/s |
| Size in m ² | 32,7m ² |


Measurements

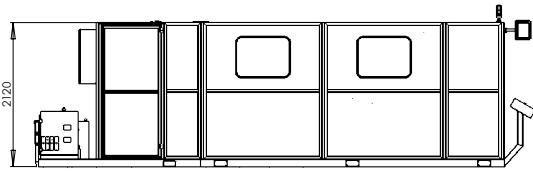

Front



Side

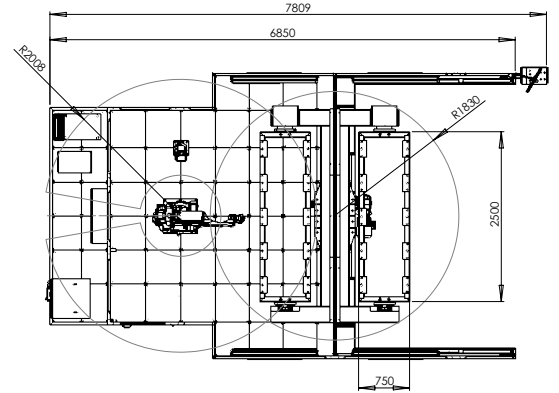

Working Area

Standard Components



OTC Robot




Power Source




SU477 Robotic Welding Torch

Optionals



Cleaning Unit



Tooling



Neuron-S Adapt