



Cell recommended to start a welding process in the company



Security system with automatic operating doors

Ideal for medium to high productivity

Fast devices exchanging system

Cell and Robot Security Controller



The **RTW SA-39** is the ideal cell for those who seek higher performance in welding combined with medium investment. The cell is equipped with security sensors for robot, power door and maintenance. With 02 workstations in 45° degrees, the cell allows more agility and productivity in the welding processes.

Ready-To-Weld robotic welding system offers the best cost benefit ratio. Designed for welding of medium size parts and where shop space maybe an issue. Increase your productivity easily and quickly, allowing an easy integration with any robot brand and power-source.

Included in package



+




+




Workstation dimensions	750 x 1000 mm
Capacity	1000 kg
Maximum current for power source	63A
Maximum current for controller and robot	16A
Feeding	380V Trifásico
Dimensions	2500 x 3800 x 2120 mm
Weight	2500 kg
Power	26 kVA
Pressure	6 BAR
Air Flow	8,8 L/s
Size in m²	8,24m ²


Measurements

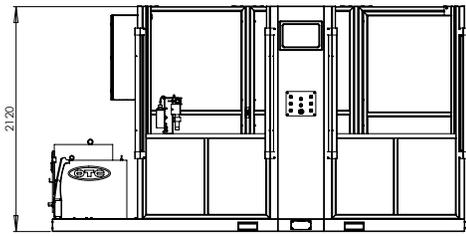

Front

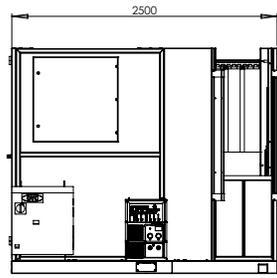

Side

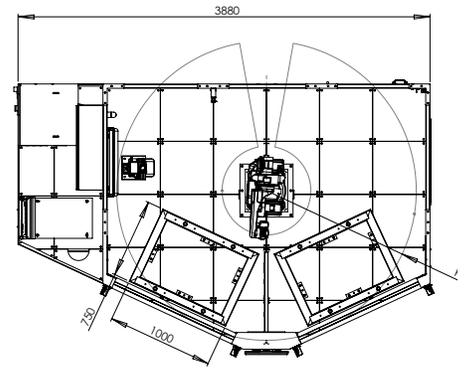

Working Area

Standard Components



OTC Robot



Power Source




SU477 Robotic Welding Torch

Optionals



Cleaning Unit



Tooling



Neuron-s Adapt